

MS201L

Flush-Mount Microphone Base with Logic Control

Description

The Astatic MS201L is a professional flush mount microphone base designed for permanent conference, boardroom, lectern, and council chamber installations. Engineered for seamless integration with standard 3-pin XLR gooseneck microphones, the MS201L provides a clean, unobtrusive mounting solution while adding intelligent system control directly at the microphone position.



Beyond basic microphone connectivity, the MS201L includes a logic output interface that enables control of external devices such as PTZ cameras, indicator lights, or automation systems. With a simple press of the touch switch, users can trigger control signals without additional interface hardware—making the MS201L ideal for modern AV integrated spaces. The integrated dual color LED ring clearly indicates the status of external devices (green = activated, red = not activated). Powered entirely via standard phantom power (DC 20–52V), the MS201L requires no external power supply and installs quickly using the included anti vibration rubber and metal fixing ring to minimize surface borne noise and handling vibration.

Powered entirely via standard phantom power (DC 20–52V), the MS201L requires no external power supply and installs quickly using the included anti vibration rubber and metal fixing ring to minimize surface borne noise and handling vibration.

Key Features & Benefits

- Flush mount desktop installation for professional, low profile appearance
- Logic output (5 pin XLR) to trigger cameras, lights, or control systems
- Dual color LED ring indicator (green = activated, red = not activated) for clear visual status of external devices
- Phantom powered operation (20–52V DC) — no external power required
- Anti vibration isolation reduces table and surface noise
- Compatible with standard XLR gooseneck microphones



MS201L

Flush-Mount Microphone Base with Logic Control


Specifications†

Product Type	Flush-mount Microphone Base with Logic Control
Frequency Response	50Hz -20KHz
Input Connector	3-pin XLR female
Output Connector	5-pin XLR male
Switch Type	Touch sensitive, momentary
Logic Output	DC +5V (pressed) / DC 0V (released)
LED Indicator	Red (not activated) Green (activated)
Phantom Power	DC 20-52V
Power Consumption	4.5 mA (typical)
Default State	Not activated on power-up
Included Accessories	Anti-vibration Rubber (1), Metal Fixing Ring (1)
Product Dimensions	2.33" x 2.32" x 6.16" (59.2mm x 59mm x 156.5mm)
Weight	10.9 oz (310g)
RoHS	Compliant

†Specifications subject to change without notice.

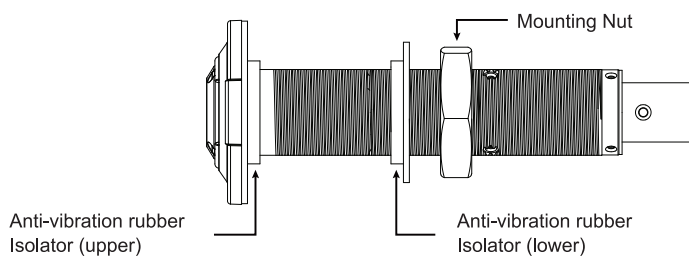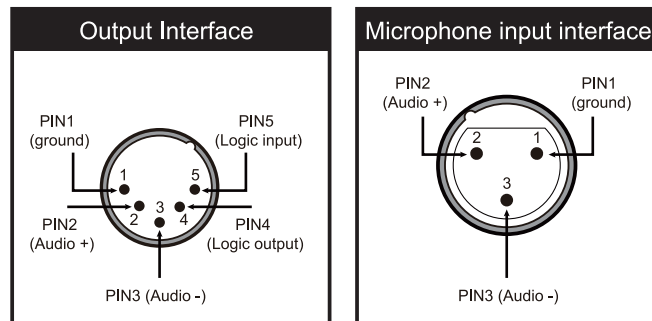

Dimensional Drawing

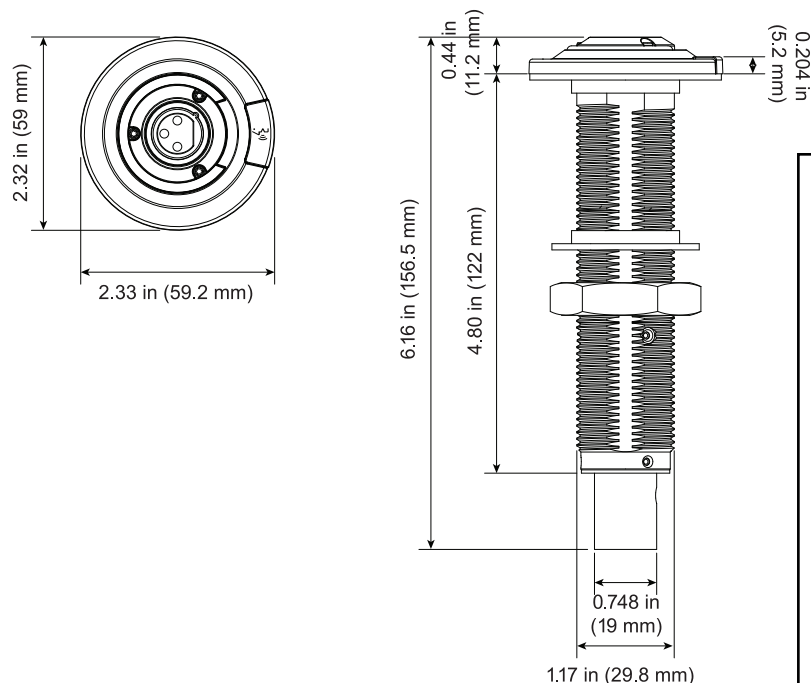

CAD Audio 154 Woodlawn Rd.
Berlin, CT 06037 USA
cadaudio.com 800-762-9266



©2026 CAD Audio Rev00 4-26

Two-Year Limited Warranty

CAD Audio hereby warrants that this product will be free of defects in material and workmanship for a period of two years from the date of purchase. In the unlikely event that a defect occurs, CAD will, at its option, either repair or replace with a new unit of equal or greater value. In the event that a suitable replacement is unavailable, CAD Audio may elect to reimburse owner for the cost of local repairs or issue a refund in the amount of the original purchase price. Items must be purchased from an authorized CAD Audio dealer, and the warranty is not transferable from the original owner. Please retain proof of purchase to validate the purchase date and include it with any warranty claim.

This warranty excludes exterior finish or appearance, damage from abuse, misuse of the product, use contrary to CAD's instructions or unauthorized repair. All implied warranties, merchantability, or fitness for a particular purpose is hereby disclaimed and CAD hereby disclaims liability for incidental, special or consequential damages resulting from the use or unavailability of this product.

This warranty gives you specific legal rights and you may have other rights that vary from state to state. Some states do not allow the exclusion or limitation of incidental or consequential damages or limitations on how long an implied warranty lasts, so the above exclusions and limitations may not apply to you.

Note: No other warranty, written or oral is authorized by CAD Audio.

To initiate a warranty claim, please contact American Music and Sound at 1-800-431-2609 to obtain a return authorization number and shipping instructions.

- A return authorization is required for all returns. RETURNS WITHOUT A PRE-APPROVED RETURN AUTHORIZATION NUMBER WILL BE REFUSED.
- Please use at least 3 inches of padding surrounding the product for protection during shipment
- Retain your tracking number until your warranty claim has been resolved
- We recommend using an insured shipping method in case of loss or damage during shipment

If outside the United States, contact your local dealer or distributor for warranty details.