

## GN18VP

### 18" Condenser Gooseneck Microphone with VersaPattern™

#### Applications:

Conference, House of Worship, Choir,  
Lecture, Educational

#### Features:

- VersaPattern™ technology offers infinitely-adjustable polar pattern between cardioid, subcardioid, omnidirectional, hypercardioid and bidirectional (fig. 8).
- Silent, durable flex pipe design with strong positioning memory
- Wide, smooth frequency response
- Quick-mount format
- Balanced transformerless output circuitry
- Foam windscreen included
- 2 Year Warranty



#### Description

Enhance your next presentation or performance with the Astatic GN18VP. Astatic has been creating valued product since 1931 and prides itself on value and innovation.

The Astatic GN18VP is a low-noise mini-gooseneck condenser microphone featuring our innovative VersaPattern™ technology, which allows for a continuously-variable polar pattern which can be precisely set for the best performance depending upon the application or environment. The wide, smooth frequency response characteristic provides natural, articulate and transparent sound.

The GN18VP includes a solid center section with flexible goosenecks at the top and bottom. The top gooseneck is 0.24" (6.2mm) in diameter and the bottom gooseneck is 0.32" (8.1mm) in diameter. The goosenecks are well-lubricated, silent in operation while maintaining strong positional memory. The overall length is 18.7" (476mm). The durable matte-black non-reflective paint assures an unobtrusive installation. Foam windscreen included. Standard P48 phantom power is required.

# GN18VP


## 18" Condenser Gooseneck Microphone with VersaPattern™

### Specifications†


**Polar Pattern**..... Continuously Variable  
**Frequency Response** ..... 60Hz- 16kHz  
**Sensitivity** .....-32dBV (25mV) @ 1 Pa  
**Impedance** ..... 150ohms  
**Dynamic Range** ..... 108dB  
**S/N Ratio** ..... 72dB  
**Connector** ..... 3-pin XLR  
**Dimensions** ..... 18.7" x 0.75"  
 (476mm x 19mm)  
**Packaged Dimensions** ..... 26" x 3.3" x 2.8"  
 (66cm x 8.3cm x 7.2cm)  
**Weight** .....0.8lbs (0.365kg)  
**Included Accessories** ..... Foam windscreen  
**RoHS**.....Compliant

†Specifications subject to change without notice.


### Omnidirectional

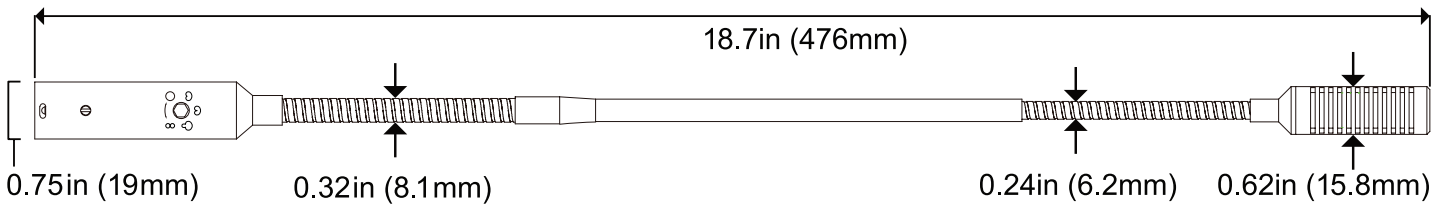

### Cardioid

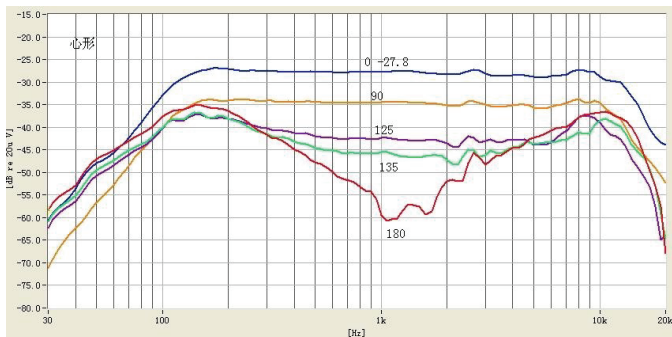

### Figure of Eight

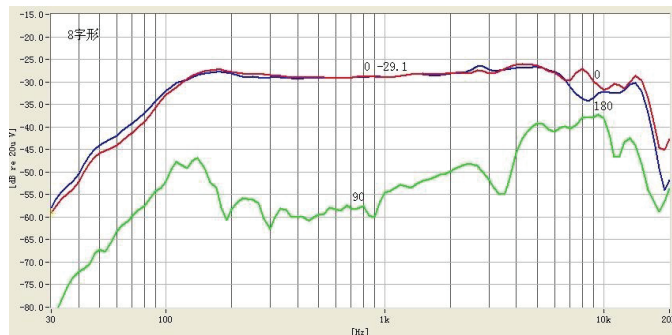

CAD Audio 310 Newberry Rd.  
 Bloomfield, CT 06002-9005 USA  
 cadaudio.com 800-762-9266  
 X Facebook YouTube

#### Limited Lifetime Warranty

CAD Audio hereby warrants that this product will be free of defects in material and workmanship for the lifetime of the original (End-User) purchaser. In the unlikely event that a defect occurs, CAD will, at its option, either repair or replace with a new unit of equal or greater value. In the event that a suitable replacement is unavailable, CAD Audio may elect to reimburse owner for the cost of local repairs or issue a refund in the amount of the original purchase price. Items must be purchased from an authorized CAD Audio dealer, and the warranty is not transferable from the original owner. Please retain proof of purchase to validate the purchase and include it with any warranty claim.

This warranty excludes exterior finish or appearance, damage from abuse, misuse of the product, use contrary to CAD's instructions or unauthorized repair. All implied warranties, merchantability, or fitness for a particular purpose is hereby disclaimed and CAD hereby disclaims liability for incidental, special or consequential damages resulting from the use or unavailability of this product.

This warranty gives you specific legal rights and you may have other rights that vary from state to state. Some states do not allow the exclusion or limitation of incidental or consequential damages or limitations on how long an implied warranty lasts, so the above exclusions and limitations may not apply to you.

Note: No other warranty, written or oral is authorized by CAD Audio.

To initiate a warranty claim, please contact American Music and Sound at 1-800-431-2609 to obtain a return authorization number and shipping instructions.

- A return authorization is required for all returns. RETURNS WITHOUT A PRE-APPROVED RETURN AUTHORIZATION NUMBER WILL BE REFUSED.
- Please use at least 3 inches of padding surrounding the product for protection during shipment
- Retain your tracking number until your warranty claim has been resolved
- We recommend using an insured shipping method in case of loss or damage during shipment

If outside the United States, contact your local dealer or distributor for warranty details.

